


**SF434C**  
**Narrow Band Low Loss RF Filter for ISM Application**  
*This product is lead-free in compliance with RoHs 2002/95/EC.*

<b>Test Conditions:</b>				
RF power	0 dBm			
Temperature	23 °C			
DC Voltage	6 V			
Terminating source impedance ( $Z_S$ ):	50 $\Omega$			<input checked="" type="checkbox"/> Matching Required
Terminating load impedance ( $Z_L$ ):	50 $\Omega$			<input checked="" type="checkbox"/> Matching Required
	minimum	typical	maximum	unit
Centre frequency		433.92		MHz
Insertion Loss in Pass Band 433.72 – 434.12 MHz		2.2	4.0	dB
Ripple in Pass Band 433.72 – 434.12 MHz		1.0	2.0	dB
Rejection				
10 MHz – 400MHz	40	50		dB
400 MHz – 429 MHz	27	45		dB
429 MHz – 432 MHz	20	30		dB
436 MHz – 443 MHz	15	25		dB
443 MHz – 450 MHz	27	45		dB
450 MHz – 600 MHz	38	48		dB
RF Power			10	dBm
Operating temperature range	-40		+125	°C
Storage temperature range	-40		+125	°C
Impedance $Z_S$		344  1.3		$\Omega$    pF
Impedance $Z_L$		344  1.3		$\Omega$    pF
Temperature coefficient of frequency		-0.032		ppm/K <sup>2</sup>

**Electrostatic Sensitive Device**


**Package: S35 / 3.8\*3.8mm<sup>2</sup>**

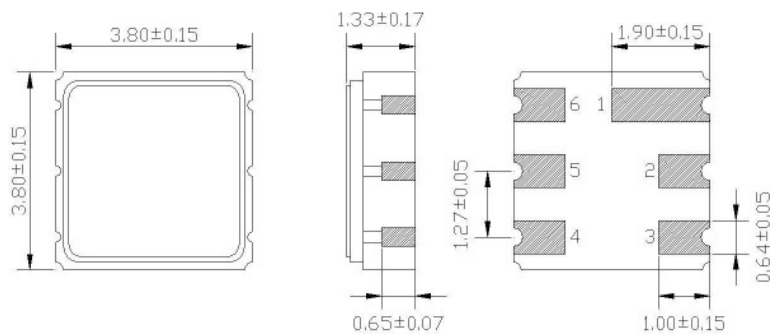

All dimensions in mm

Pin 2                    Input  
Pin 5                    Output  
Pin 1, 3, 4, 6        to be grounded


**Typical performance:**

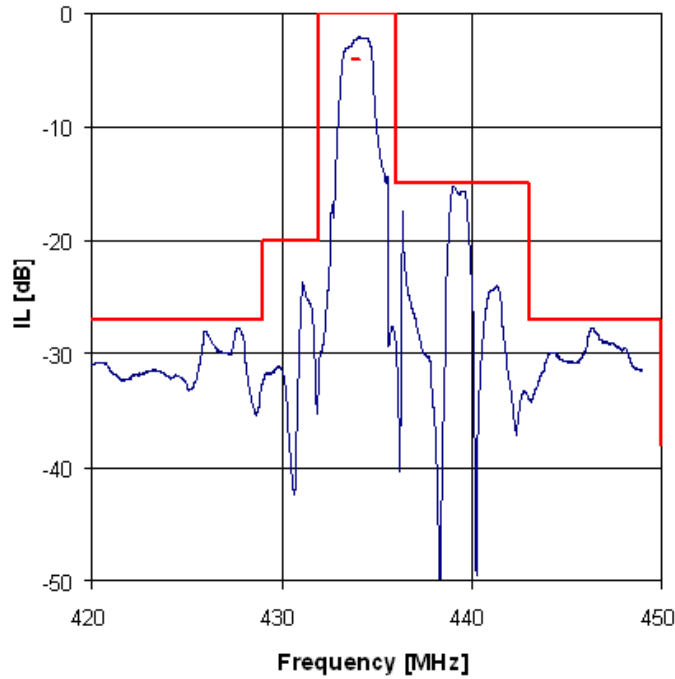

**Matching network to 50  $\Omega$ :** <sup>1)</sup>

$L_{IN}$ : 56nH  
 $C_{IN}$ : 7pF

$L_{OUT}$ : 56nH  
 $C_{OUT}$ : 7pF

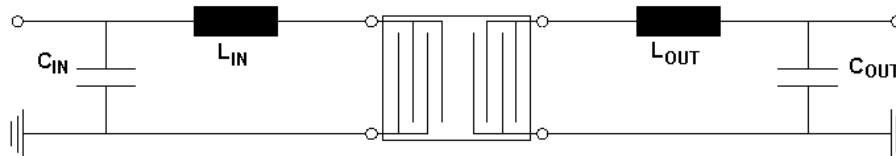

<sup>1)</sup> Matching elements are based on circuit with ideal components.  
Matching values may vary due to PCB layout and real components.